SAFEWAY GROUP

Safeway Technologies Ltd.

(a concern of **SAFEWAY GROUP**)

কংক্রিট ব্লক/ ইউনি পেভার/পরিবেশ বান্ধব ইট তৈরির মেশিন আমদানী ও সরবরাহকারী নির্ভরযোগ্য প্রতিষ্ঠান





আর নয় মাটি পোড়ানো ইটের ব্যবহার, আপনার নির্মাণ হোক পরিবেশ বান্ধব কংক্রিট ব্লক/ ব্রিকস দিয়ে প্রযুক্তি সাশ্রয়ী ও দীর্ঘস্থায়ী।



Head Office:
House-2, Road-2/3, Block-L,
Banani, Dhaka-1213, Bangladesh
Hotline:
01822132851, 01730793660
Website:www.safewaytech.com

Warehouse:
Barua, Khilkhet, Dhaka-1229, Bangladesh
Rangpur Branch:
Ganeshpur, Rangpur, Bangladesh
Chittagong Branch:
Bashghata, Firingi Bazar, Bangladesh

Contacts:

Dhaka	:01730793649	Sylhet	:01730793651
Khulna	:01730793646	Rajshahi	:01730793652
Chittagong	:01730793647	Bogra	:01730793655
Mymanshing	:01730793648	Rangpur	:01730793656
Barishal	:01730793650	Jashore	:01332537625

ABOUT US

Safeway Technoglogies Ltd. is a concern of **Safeway Group.** This is a Pioneer machinery supplier company in Bangladesh for all kinds of industrial machinery. The company motto is ***"Technology for moving forward"*** and our two brand is **"SafewayTech"& "STL".** With a focus on innovation and customer satisfaction, we have been a trusted partner for businesses of all sizes since 2015.

Our Mission: To empower Bangladesh's industries by providing high-quality, reliable machinery and comprehensive support services. We aim to create a more prosperous and self-sufficient nation by setting up 3000 projects across various sectors by 2030.

Our Service

Import and Supply: We supply industrial machinery from renowned manufacturers worldwide, including China, Taiwan, Turkey, Italy, England, and the USA.

Project Setup: Our team has completed over 600 projects, ranging from small-scale operations to large-scale manufacturing facilities on several Industry.

Installation and Training: We offer professional installation services and comprehensive training programs to ensure optimal machine performance and operator proficiency.

After-Sales Support: Our commitment to customer satisfaction extends beyond the sale. We provide free after-sales services to address any technical issues or maintenance needs.

Our Products:

- ★ Concrete Block, Bricks, Tiles & Construction Machinery
- ★ CNC Router, Jointer, Moulder & Wood Working Machinery
- ★ Fiber Laser Metal Cutting & Laser Marking Machine
- ★ Ready Mix Batching Plant & Concrete Mixer Truck
- ★ Paper Cup, Plate, Bag & Others Items Making Machinery
- ★ Plastic Injection Molding & Others Items Making Machinery
- ★ Fire Safety, Luggage-Baggage Scanner & Security Equipment
- ★ Footwear, Leather-goods & Sole Making Machinery
- ★ Garments Sewing, Mask & PPE Making Machinery
- ★ Non-woven Bag, Paper Bag Making Machinery
- ★ Import-Export, Consultancy, Training & Technical Support
- ★ Other All Kinds of Induxtrial Machinery & Tanking Project


STL 10000G



Line Technical Parameters:

Total Rated Power	178.45 KW	Shed	80*150*22'
Delivery Capacity	100000+/- pcs	Power Voltage	380V/ 415 V AC
Plate Size(mm)	1250*900*30 mm	Labour	8-10 people
Plate Quantity	2000 pieces	Forming Period	15S-20S
Water Consumption	12-15T/day	Gross Weight	45 Ton

Production capacity Table:

Size (LxWxH)mm	Photos	Pcs/Mold	Pcs/Hour	Pcs/Day
Hollow Block 390x190x100		20	3600-4800	36000-48000
Solid Brick with Logo 240x115x70		24	4320-5760	43200-57600
Solid Brick without Logo 240x115x70		46	8280-11040	82800-110400
Paver 222x110x80		28	5040-6720	50400-67200
Curve Stone 500x250x150		6	1080-1440	9500-12500
Raiging 500x250x150		6	1080-1440	9500-12500

STL 9000G



Line Technical Parameters:

Total Rated Power	135 KW	Shed	70*140*21'
Delivery Capacity	75000 pcs	Power Voltage	380V/ 415 V AC
Plate Size(mm)	1250*750*30mm	Labour	6-8 people
Plate Quantity	2000 pieces	Forming Period	15S-20S
Water Consumption	12-15T/day	Gross Weight	40 Ton

Production capacity Table:

Size (LxWxH)mm	Photos	Pcs/Mold	Pcs/Hour	Pcs/Day
Hollow Block 390x190x100		18	3240-4320	32400-43200
Solid Brick with Logo 240x115x70		22	3960-5280	39600-52800
Solid Brick without Logo 240x115x70		36	6480-8640	64800-86400
Paver 222x110x80		25	4500-6000	45000-60000
Curve Stone 500x250x150		4	720-960	6400-8600
Raiging 500x250x150		4	720-960	6400-8600

STLQT10-15/ STLQT12-15



Line Technical Parameters:

Total Rated Power	120 KW	Shed	80*120*18’
Delivery Capacity	60000/75000 pcs	Power Voltage	380V/ 415 V AC
Plate Size(mm)	1250*900*30 mm	Labour	5-6 people
Plate Quantity	2000 pieces	Forming Period	15S-20S
Water Consumption	12-15T/day	Gross Weight	45 Ton

Production capacity Table:

Size (LxWxH)mm	Photos	Pcs/Mold	Pcs/Hour	Pcs/Day
Hollow Block 390x190x100		20/ 24	3600-4800/ 4320-5760	28800-38400/ 34560-46080
Solid Brick with Logo 240x115x70		27/ 30	4860-6480/ 5400-7200	38880-51840/ 43200-57600
Solid Brick without Logo 240x115x70		42/ 48	7560-10080/ 8640-11520	60480-80640/ 69120-92160
Paver 222x110x80		30/ 33	5400-7200/ 5940-7920	43200-57600/ 47520-63360

STLQT8-15/STLQT9-15



Line Technical Parameters:

Total Rated Power	117 KW	Shed	80*120*18’
Delivery Capacity	50000/60000 pcs	Power Voltage	380V/ 415 V AC
Plate Quantity	2000 Pieces	Labour	5-6 people
Water Consumption	12-15T/day	Forming Period	15S-20S

Production capacity Table:

Size (LxWxH)mm	Photos	Pcs/Mold	Pcs/Hour	Pcs/Day
Hollow Block 390x190x100		16/ 18	2880-3840/ 3240-4320	23040-30720/ 25920-34560
Solid Brick with Logo 240x115x70		21/ 25	3780-5040/ 4500-6000	30240-40320 36000-48000
Solid Brick without Logo 240x115x70		36/ 40	6480-8640/ 7200-9600	51840-69120/ 57600-76800
Paver 222x110x80		24/ 33	4320-5760/ 5940-7920	34560-46080/ 47520-63360

STL-QT6-15P



Line Technical Parameters:

Total Rated Power	84.91 KW	Shed	60*120*18’
Delivery Capacity	35000-45000 pcs	Power Voltage	380V/ 415V AC
Plate Size(mm)	1010x700x30mm	Labour	4-6 people
Plate Quantity	1500-2000 pcs	Forming Period	15S-20S
Water Consumption	8-10T/day	Gross Weight	30 Ton

Production capacity Table:

Size (LxWxH)mm	Photos	Pcs/Mold	Pcs/Hour	Pcs/Day
Hollow Block 390x190x100		12	2160-2500	18500-22000
Solid Brick with Logo 240x115x70		17	3500-4000	32000-36500
Solid Brick without Logo 240x115x70		27	5600-6400	50000-55000
Paver 222x110x80		20	3600-4800	29000-34000
Curve Stone 500x250x150		3	540-720	4800-6400
Raiging 500x250x150		3	540-720	4800-6400

STL-QT5-15P



Line Technical Parameters:

Total Rated Power	60 KW	Shed	50*100*18’
Delivery Capacity	30000-40000 pcs	Power Voltage	380V/415V AC
Plate Size(mm)	1100x550x28mm	Labour	8-10 People
Plate Quantity	1000 pcs	Forming Period	15-20 S
Water Consumption	3-5 T/day	Gross Weight	15 Ton

Production capacity Table:

Size (LxWxH)mm	Photos	Pcs/Mold	Pcs/Hour	Pcs/Day
Hollow Block 390x190x100		9	1620-1900	14000-17000
Solid Brick with Logo 240x115x70		16	3300-3800	26000-33000
Solid Brick without Logo 240x115x70		26	5400-6200	40000-50000
Paver 222x110x80		16	2880-3500	23040-26000
Curve Stone 500x250x150		4	720-960	6400-8600
Raiging 500x250x150		4	720-960	6400-8600

STL-QT4-15P




Line Technical Parameters:

Total Rated Power	57.75 KW	Shed	40*80*18’
Delivery Capacity	25000-35000 pcs	Power Voltage	380V/ 415V AC
Plate Size(mm)	1010x550x28mm	Labour	8-10 People
Plate Quantity	800-1000 pieces	Forming Period	15-20 S
Water Consumption	3-5 T/day	Gross Weight	13.5 Ton

Production capacity Table:

Size (LxWxH)mm	Photos	Pcs/Mold	Pcs/Hour	Pcs/Day
Hollow Block 390x190x100		8	1440-1920	11520-15360
Solid Brick with Logo 240x115x70		14	2520-3360	20160-26880
Solid Brick without Logo 240x115x70		24	3960-5280	31680-42240
Paver 222x110x80		14	2520-3360	20160-26880
Curve Stone 500x250x150		3	540-720	4800-6400
Raiging 500x250x150		3	540-720	4800-6400

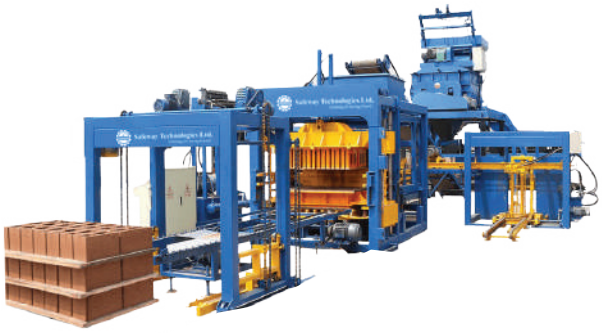STL-QT4-15A



Line Technical Parameters:

Total Rated Power	57.75 KW	Shed	40*80*18’
Delivery Capacity	20000 -25000 pcs	Power Voltage	380V/ 415V AC
Plate Size(mm)	1010x550x28mm	Labour	8-10 People
Plate Quantity	800-1000 pcs	Forming Period	15-20 S
Water Consumption	3-5 T/day	Gross Weight	13.5 Ton

Production capacity Table:

Size (LxWxH)mm	Photos	Pcs/Mold	Pcs/Hour	Pcs/Day
Hollow Block 390x190x100		7	1050-1260	10500-12600
Solid Brick with Logo 240x115x70		12	1800-2200	18000-22000
Solid Brick without Logo 240x115x70		20	2200-2800	22000-28000
Paver 222x110x80		12	1700-2000	17000-20000
Curve Stone 500x250x150		3	540-720	4800-6400
Raiging 500x250x150		3	540-720	4800-6400

STL-QT4-15B



Line Technical Parameters:

Total Rated Power	38.45 KW	Shed	40*80*18’
Delivery Capacity	15000- 20000 pcs	Power Voltage	380V/415V AC
Plate Size(mm)	880x550x25MM	Labour	8-10 People
Plate Quantity	800-1000 pcs	Forming Period	15-20 S
Water Consumption	3-5 T/day	Gross Weight	8,500 KG

Production capacity Table:

Size (LxWxH)mm	Photos	Pcs/Mold	Pcs/Hour	Pcs/Day
Hollow Block 390x190x100		7	1260-1470	10080-11760
Solid Brick with Logo 240x115x70		12	2160-2520	17280-20160
Solid Brick without Logo 240x115x70		20	3600-4200	28800-33600
Paver 222x110x80		12	1900-2000	15200-16000
Curve Stone 500x250x150		3	540-720	4800-6400
Raiging 500x250x150		3	540-720	4800-6400

STL-QTJ4-24



Line Technical Parameters:

Total Rated Power	38 45 KW	Block Yard Area	2000 sft
Delivery Capacity	15000± pieces	Power Voltage	380V/400V AC
Plate Size(mm)	850-880x550x25MM	Labour	6-8 People
Plate Quantity	800-1000 pcs	Forming Period	25-30S
Water Consumption	3-5 T/day	Gross Weight	5,000 KG

Production capacity Table:

Size (LxWxH)mm	Photos	Pcs/Mold	Pcs/Hour	Pcs/Day
Hollow Block 390x190x100		6	500-600	4000-4800
Solid Brick with Logo 240x115x70		12	1400-1700	11200-13600
Solid Brick without Logo 240x115x70		20	1800-2200	14400-17600
Paver 222x110x80		12	1400-1700	11200-13600

Machine List



Cement Silo



Batching Plant



Planetary Concrete Mixer



Concrete Mixer



Pan Mixer



Conveyer Belt



Host Machine




Stacker Machine




Forklift



Pay Loader



Mould



PLC Controller System



Mould



Rack System









Mould Frame Dumping Airbag











Fully Automatic Concrete Block Production Line

Block Samples

Hollow block design

 H1	 H2	 H3	 H4	 H5	 H6	 H7	 H8
400x200x200mm 8 inch	400x150x200mm 6 inch	400x125x200mm 5 inch	400x100x200mm 4 inch	400x200x200mm 8 inch	400x150x200mm 6 inch	400x100x200mm 4 inch	400x150x200mm 5 inch
 H9	 H10	 H11	 H12	 H13	 H14	 H15	 H16
500x150x200mm	400x150x200mm 6 inch	530x150x200mm	400x125x200mm	400x200x200mm 8 inch	400x150x200mm 6 inch	400x150x200mm	400x200x200mm 8 inch
 H17	 H18	 H19	 H20	 H21	 H22	 H23	 H24
420x200x200mm	400x150x200mm 6 inch	400x200x200mm 8 inch	240x115x53mm	200x90x60mm	110x60x210mm	240x115x65mm	330x330x190mm

Paver design

 P1	 P2	 P3	 P4	 P5	 P6	 P7	 P8
200x100x200mm	230x140x60mm	200x100x60mm	225x112.5x60mm	400x200x60mm	200x160x60mm	400x400x60mm	Sub 250X60mm
 P9	 P10	 P11	 P12	 P13	 P14	 P15	 P16
400x400x60mm	400x400x60mm	400x400x60mm	400x400x60mm	Diag 250x60mm	250x250x60mm	Diag199x60mm	250x227X60mm
P17	P18	P19	P20	P21	P22	P23	P24
358x358x60mm	400x400x60mm	400x400x60mm	400x400x60mm	400x600x60mm	400x400x60mm	120x90x60mm	200x100X60mm

Curbstone design

C1	C2	C3	C4	C5	C6	C7	C8

Block/Brick Making Cost of one Bag Cement and required materials per one cycle

1 BAG Cement = 1.22 CFT

Material Name	Quantity	Unit Price (Taka)	Total Price (Taka)
Cement (OPC, Akij or 7Ring) 1Bag	1.22 CFT	550.00	550.00
Sylhet Sand	3 CFT	70.00	210.00
Local Sand	5 CFT	20.00	100.00
Nuri Stone	2 CFT	60.00	120.00
Chemical (180 taka Kg)	250 gm	180.00	45.00
Electricity	0.264 KVA		2.25
Labor cost			14.00
Machine depreciation			0.42
Machine maintenance			0.42
Marketing and office expenses			3.00
Total Taka (1 bag cement and required materials cost)			**1,045.00**



সিমেন্ট



বালি (প্লাস্টার ও মোটা)



পাথর কণা



পানি

Block/Brick production (1 bag cement and required materials) will be:

** Block Size 190x390x100 mm - production 32 Psc per Cycle, Per unit cost: 32.65 Taka
** Solid Brick size 240x115x70 mm - Best quality production 115 Pcs, Per unit cost: 9 Taka
** Solid Brick (with 6 wholes) size 240x115x70 mm - 125 Pcs, Per unit cost: 8.36 Taka.

কংক্রিট ব্লক/ পরিবেশ বান্ধব ইট ও পোড়া মাটির ইটের পার্থক্য:

	পোড়া মাটির ইট	কংক্রিট ব্লক/ পরিবেশ বান্ধব ইট
আকার	৯৷৪.২৫৷২.৭৫ ইঞ্চি	১৫.৬৷৭.৬৷৪ ইঞ্চি
সংখ্যা	প্রায় ৫টি	১টি (প্রায় ৫টির সমান)
তৈরীর কাঁচামাল	কৃষি জমির উর্বর মাটি	সিমেন্ট, সাদা বালি, সিলেকশন বালি, নুড়ি পাথর, পানি
ওজন	৫টির ওজন প্রায় ১৫-১৬ কেজি	১টির ওজন প্রায় ১১-১২ কেজি
চাপ নেওয়ার ক্ষমতা	৭-৯ এম.পি.এ	৮-১২ এম.পি.এ
পানি শোষন ক্ষমতা	১২.৬% থেকে ২০.৫৫%	২.২২% থেকে ৪.৮৪%
শব্দ দেয়াল ভেদ করার ক্ষমতা	৬ থেকে ১১ ডেসিবল	২ থেকে ৪ ডেসিবল
ঘরের ভেতর তাপমাত্র	স্বাভাবিক	ঘরের ভিতর গরমকালে ঠান্ডা এবং শীতকালে গরম থাকে
প্লাস্টার	২০-২৫ এম.এম লাগে	১০-১২ এম.এম লাগে
পার্শ্বদেশ	আগুনে পোড়া ইটের পার্শ্বদেশ এবড়ো থেবড়ো	হলো ব্লকের পার্শ্বদেশ সমান এবং দেখতেও সুন্দর দেখায়
স্ট্র্যাংথ	১২০০-১৫০০ পি.এস.আই	২৫০০-৩০০০ পি.এস.আই





পরিবেশ বান্ধব কংক্রিট "হলো ব্লক" ও "সলিড ব্রিক" ব্যবহারে সুবিধা ঃ

একটি "হলো ব্লক" প্রায় পাঁচটি লাল ইটের সমান।
৮টি সলিড ব্রিক ১০টি পোড়া মাটি লাল ইটের সমান।
বিল্ডিং এর স্থায়ী ওজন কম হয়, তাই ভূমিকম্প সহনীয় ও ভিত্তির খরচ কম।
ইটের চেয়ে বেশী মজবুত, দীর্ঘস্থায়ী ও দেখতে সুন্দর।
অধিন ইনসুলেশন (ঘরের ভিতর গরমের সময় ঠান্ডা ও ঠান্ডার সময় গরম থাকে এবং শব্দ নিরোধক)।
শোষিত পানি ধরে রাখে না বিধায় কংক্রিট ব্লকে নোনায় ধরে না, ডাম্প হয়না, ঘামে না এবং দীর্ঘস্থায়ী হয়।
৬০%-৬৫% প্লাস্টার সাশ্রয়ী অর্থাৎ কম প্লাস্টারে দেয়াল সম্পন্ন।
দেয়াল না কেটে সহজেই প্লাম্বিং ও ইলেকট্রিকের কাজ করা যায়।
আপনার বিল্ডিং এর নির্মাণ খরচ কমাবে ২৫%-৩০%।
বাউন্ডারী দেয়ালের ক্ষেত্রে বাড়তি প্লাষ্টার না করলেও দেওয়ালের কোন ক্ষতি হয়না।
প্লাস্টার এর থিকনেস নিয়ন্ত্রণে থাকে।
দ্রুত দেয়ালের গাঁথুনীর কাজ করা যায়, ফলে লেবার খরচও কম হয়।
পরিবহনে ভাঙ্গার হার খুবই কম।
সারা বছর এই হলো ব্লক ও সলিড ব্রিক পাওয়া যায়।
প্লাস্টার না করেও সমতল দেওয়াল তৈরী করা যায়।
ওজনে হালকা ও সহজে বহণযোগ্য তাই ব্যবহার করা সহজ এবং নির্মাণ কাজে সময় বাঁচে।
ফসলী জমির উপরের স্তরের মাটি ব্যবহার না হওয়ায় ফসলী জমি ক্ষতি হতে রক্ষা পায়।
পোড়াতে হয় না বিধায় কোন প্রকার কার্বন ডাই অক্সাইড ও সালফার ডাই অক্সাইড গ্যাস নিঃসরণ হয় না এবং পরিবেশ দূষণ হয় না।

Materials Proportion

This is the most popular proportion in making block making machine:

1. Cement, Sand, Stone (Standard Concrete Block):

Raw Materials	Quantity per piece
Water	3%
Cement	9-12%
River sand	40%
Crushed stone	45%
Other specify	You can change the proportion depend on customer demand. This block is heavy, but strong

2. Cement, Slag (Light Concrete Block):

Raw Materials	Quantity per piece
Water	3%
Cement	9-12%
Slag	80-90%
Other specify	You can change the proportion depend on customer demand. This block is light, not so strong

প্রকল্প বাস্তবায়নে আমাদের করণীয়:

- শিল্প উদ্যোগতার সাথে প্রাক আলোচনা, ডাটা সংগ্রহ, তথ্য আদান প্রদান ও পরামর্শ প্রদান।
- প্রকল্পের জায়গা পরিদর্শন, জরিপ ও ফ্যাক্টরী আয়তন নির্ণয়।
- প্রকল্পের মষ্টার প্ল্যান, মেশিনারী সিলেকশন ও মেশিনারি লে-আউট প্রদান।
- প্রজেক্ট প্রোফাইল, ফিজিবিলিটি স্ট্যাডি, প্রকল্প বাস্তাবায়নে খরচ নির্ণয়।
- মেশিনারি ইমপোর্ট, কাষ্টাম ক্লিয়ারিং এবং ফ্যাক্টরিতে ডেলিভারি।
- মেশিনারি ইন্সটলেশন, ট্রেনিং ও পরীক্ষা মূলক উৎপাদন।
- মেশিনারি মেইন্টেনেস, স্পেয়ার পার্টস সরবরাহ ও প্রতিস্থাপন।
- পণ্যের বানিজ্যিক উৎপাদনে প্রতিনিয়ত কারিগরি সহায়তা প্রদান।
- জনবলের দক্ষতা উৎপাদনের গতি ও পণ্যের মান উন্নয়নে সহায়তা প্রদান।

আমাদের মেশিনের বিশেষত্ব:

- জার্মান টেকনোলজির ইলেক্ট্রমেকানিক্যাল/ মাল্টিফাংশনাল, চখঈ কন্ট্রোল হাইড্রোলিক অটোমেটিক মেশিন হওয়ায় শতভাগ প্রডাকশন কোয়ালিটি পাওয়া যায়।
- জাপান ও তাইওয়ানের ইলেক্ট্রিক্যাল ও মেকানিক্যাল কম্পোনেন্ট ব্যবহারের ফলে উৎপাদনের সাইকেল টাইম অপেক্ষকৃত কম। ঈউ স্ট্যান্ডার্ড, হেভি ডিউটি স্টিল (হাই পাঞ্চ মেটাল), কার্বন-ডাই-অক্সাইড ওয়েল্ডিং পদ্ধতিতে মেশিনের বডি নির্মিত হওয়ায় মেশিন মজবুত ও দীর্ঘস্থায়ী হয়। তাছাড়া ক্রোমপ্লেটেড সারফেস, মরিচা ও ক্ষয় রোধ করে।
- হাই কোয়ালিটি মেটাল ব্যবহার, মোল্ডিং, ওয়ার কাটিং এবং হাইট্রিটমেন্ট প্রযুক্তি প্রয়োগ করে মেশিনের মোল্ড প্রস্তুত করায় মোল্ডের এ্যাকুইরেসি রেট ৯৯.৯৯% অপরিবর্তন, ক্ষয় রোধক ও দীর্ঘস্থায়ী হয় এবং সঠিক মাপের কংক্রিট ব্লক/ ব্রিকস তৈরী হয়।
- ফ্রিকুইন্সি ইনভাটার ব্যবহার, হাইড্রোলিক প্রেসার কন্ট্রোল ও মেশিনের ভাইব্রেশন পরিবর্তন ও নিয়ন্ত্রণের মাধ্যমে কংক্রিট ব্লক/ ব্রিকসের সঠিক চঝও পাওয়া যায় এবং শতভাগ গুণগত মান অক্ষুন্ন থাকে।
- হাই কোয়ালিটি মোটর, ফ্রিকুইন্সি ইনভাটার ভাল্ব, গিয়ার বক্স সহ উন্নতমানের অন্যান্য পার্টস ব্যবহারের ফলে প্রডাকশন এ সিস্টেম লস অনেক কম হয়।

Other's Machinery



Fiber Laser Cutting & Marking Machine



Bodor Fiber Laser Cutting



Bodor Tube Cutting Machine



CNC Router Machine



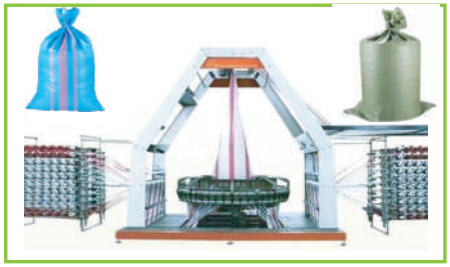
Automatic Non-woven Bag Making Machine



All Kinds of Security Equipment



Automatic Paper Cup/Plate Making Machine



Automatic PP Woven Bag Making Machine



Bodor Welding Machine



Automatic Paper Bag Making Machine



STL CO2 Laser Machine



All Kinds of Plastic Injection Molding Machine



Hydraulic Forklift & Hydraulic Wheel Loader



Automatic Tissue Folding Machine



Laser Marking Machine



Universal Concrete Pump



CNC Router Machine



Construction Crane & Excavator

Our Work


Gazipur


Shah Cement


Cox's Bazar




Netrokona


Agreement


Agreement


Zajira




Shariatpur


Panchagarh


Rajbari


Kurigram


Ashulia


Khilkhet, Dhaka


Bhairab


Tangail


Chienese Engineer Visited our factory



Our Team




Award Receving


Award Receving


Warehouse


Our Team



Safeway GROUP

Beyond the Borders

OUR CONCERNS

Safeway Technologies Ltd.
Safeway Agro Farms Ltd.
Safeway Trade International.
Safeway Trainning Institute
STL Door and Design, Rangpur
Safeway Eco Concrete Products Ltd.

Head Office: House # 02, Road # 2/3, Block # L, Banani, Dhaka-1213, Bangladesh.
E-mail: info@safewaytech.com, Web: www.safewaytech.com
Hotline: +88 01730 793 660, +88 01822 132 851

Import-Export, Industrial Machinary Supply & Technical Support